


H LUM FARM



**LUMENIA
INDUSTRIAL**

With its high grade of protection against dust, contamination and water permeation, H LUM LED FARM light is a perfect solution for illuminating spaces with dusty and humid environments. It is specially developed for farming and industry and chemically aggressive environments.

	H LUM FARM
System efficacy	138 lm/W
Supply voltage	220-240 VAC
Power	150 W
Luminous flux	20,695 lm
Lifetime L80B10	Up to 50,000 hours
CCT	4000K
CRI	>70
Ingress protection	IP 65
Mechanical strength	IK 08
Operating temperature	-20 °C to +45 °C
Remote control options	DALI (optional)
Electrical / Appliance class	Class I
Dimensions (L x w x h)	980x256x109 mm
Weight	11 kg
Colour	Black Double layer polyester powder paint
Diffusor	PMMA optical cover
Housing material	Corrosion resistant extruded aluminium body
Mounting	Pendant or surface
Warranty	5 years
Certificates	CE

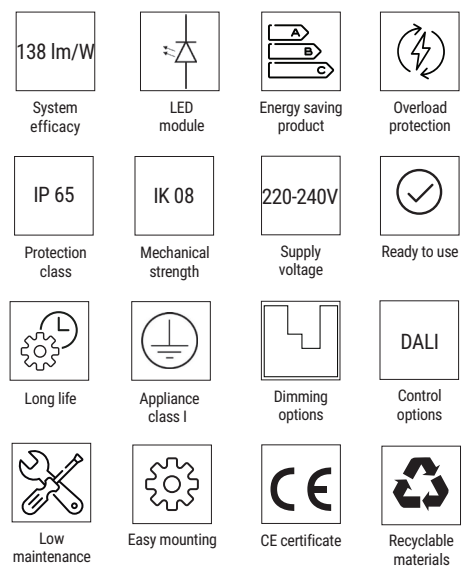



MAIN FEATURES

Chemical Resistant & Ammonia Proof
Heat & Impact Resistant
ENEC Certified Driver

APPLICATIONS

Farming
Chemically Aggressive Environments

DIMENSIONS

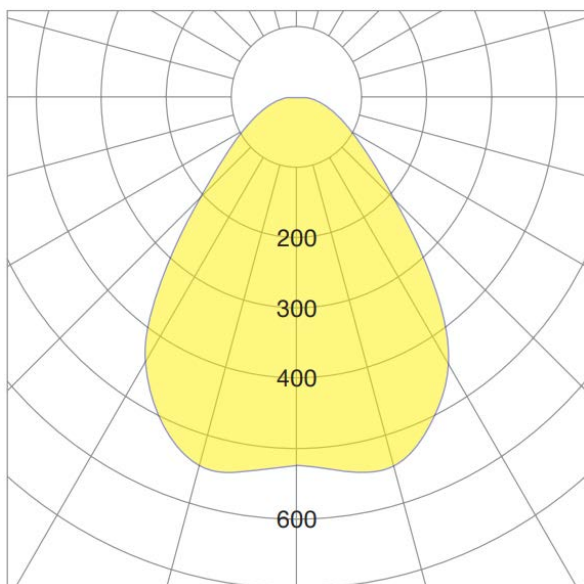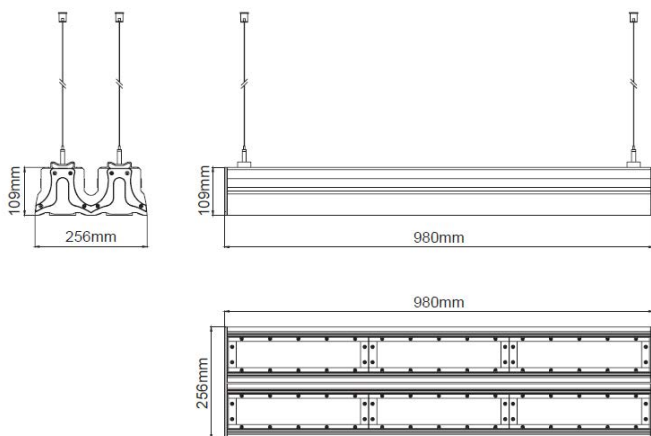

80° beam angle

PRODUCT VARIATIONS

H LUM FARM

Article	Power [W]	Luminous flux [lm] *	Efficacy [lm/W]
H LUM FARM 150.4000.90	150	20,695	138

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.